



California Faucets®


# Tamalpais™

## EXTRA DELUXE WALL TUB SPOUT

### Features

- 12" wall to center
- Max flow rate: 16 gpm (60.6 L/min)
- For use with StyleTherm, 3-VR or 2-VR valves
- Solid brass construction
- Over 30 finishes including 15 PVD finishes


### DE-74-74

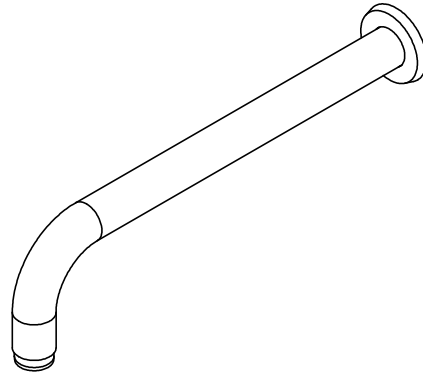

### Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1

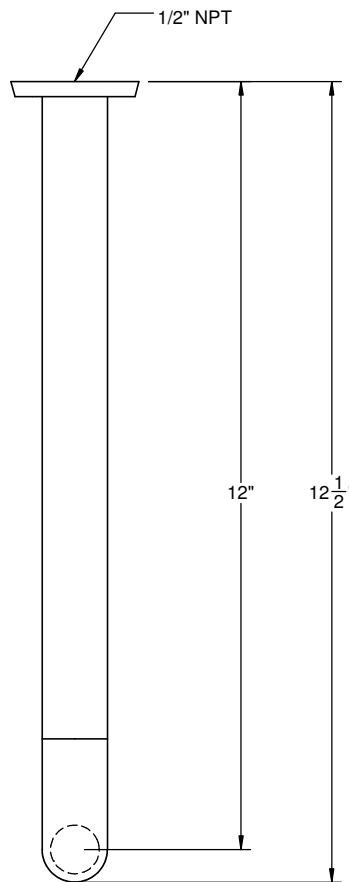

| THROUGH-HOLE SPECIFICATIONS |            |           |
|-----------------------------|------------|-----------|
| MIN                         | RECOMENDED | MAX       |
| Ø 1-1/4"                    | Ø 1-3/8"   | Ø 1-9/16" |

